


Face avant et arriere

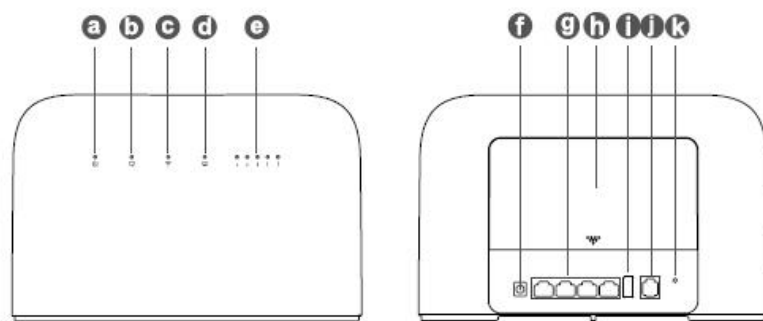

5 indicateurs sont places sur l'avant du modem:

a. Indicateur de tension. S'allume dès que le modem est sous tension.

b. État du réseau mobile. Couleur en fonction du réseau (vert/bleu/jaune = 4G/3G/2G)

c. État du réseau Wi-Fi

d. État connection Ethernet

e. Puissance du signal mobile. Indique la puissance du réseau mobile

f. Prise courant


g. Prises Ethernet LAN/WAN (#4 = WAN)

h. Prises antennes SMA (couverte)

i. Prise USB

k. Bouton remise a zéro

Autres

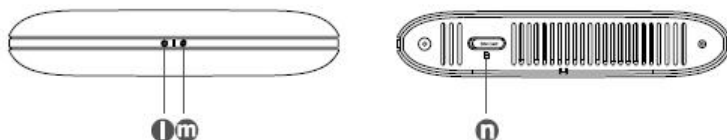


l. interrupteur marche/arrêt

m. bouton WPS. Garder appuyé 2 à 5 secondes pour une connection 2.4 GHz et plus de 5 secondes pour une connection 5 GHz..


UTILISATION

INSERER CARTE MICRO SIM

- Ouvrir le couvercle
- Vérifier que le modem est hors tension avant d'insérer ou retirer la carte Micro-SIM



CONNECTION WIFI



L'identifiant (SSID) du réseau (5 et 2,4Ghz) et mots de passe liés sont indiqués sur l'autocollant placé sous les antennes.


MODIFICATION DES DONNEES

Connection au menu de configuration du modem


La connection WIFI ou ETHERNET une fois établie les données du modem sont modifiables de la façon suivante:

Démarrer Explorateur/Safari...

1. Entrez l'adresse <http://192.168.1.1> ou <http://dna.mokkula>
2. Modifiez la langue en choisissant « Kieli » puis « English » en haut à droite de l'écran
3. Entrez admin pour utilisateur (si besoin) et 1234 comme mot de passe
4. Vous pouvez également installer l'application mobile Huawei en scannant le code barre (optionel)

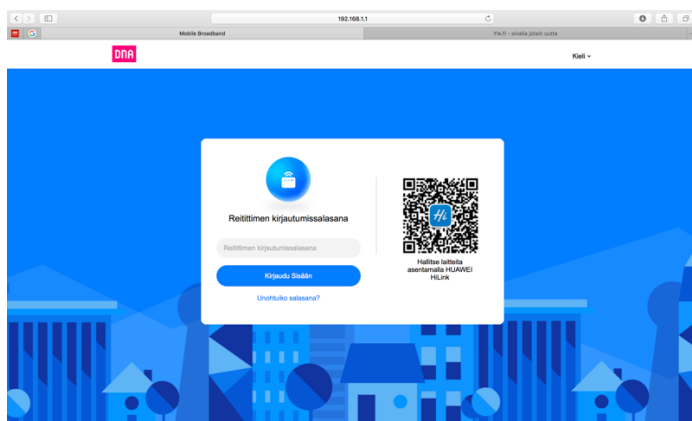


Mises a jour automatiques : cochez la case

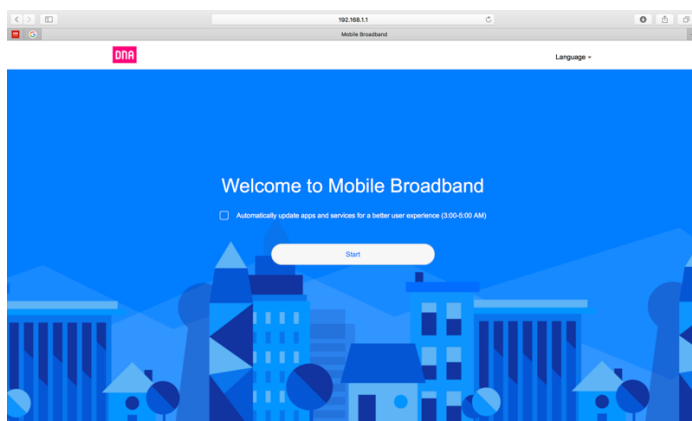

HUAWEI B715 – GUIDE D'INSTALLATION RAPIDE

Pour établir la connexion 4G/mobile modifiez les données spécifiques a votre operateur (APN)

Modifiez les identifiants des réseaux WIFI 5G et 2,4G ainsi que le mot de passe WIFI

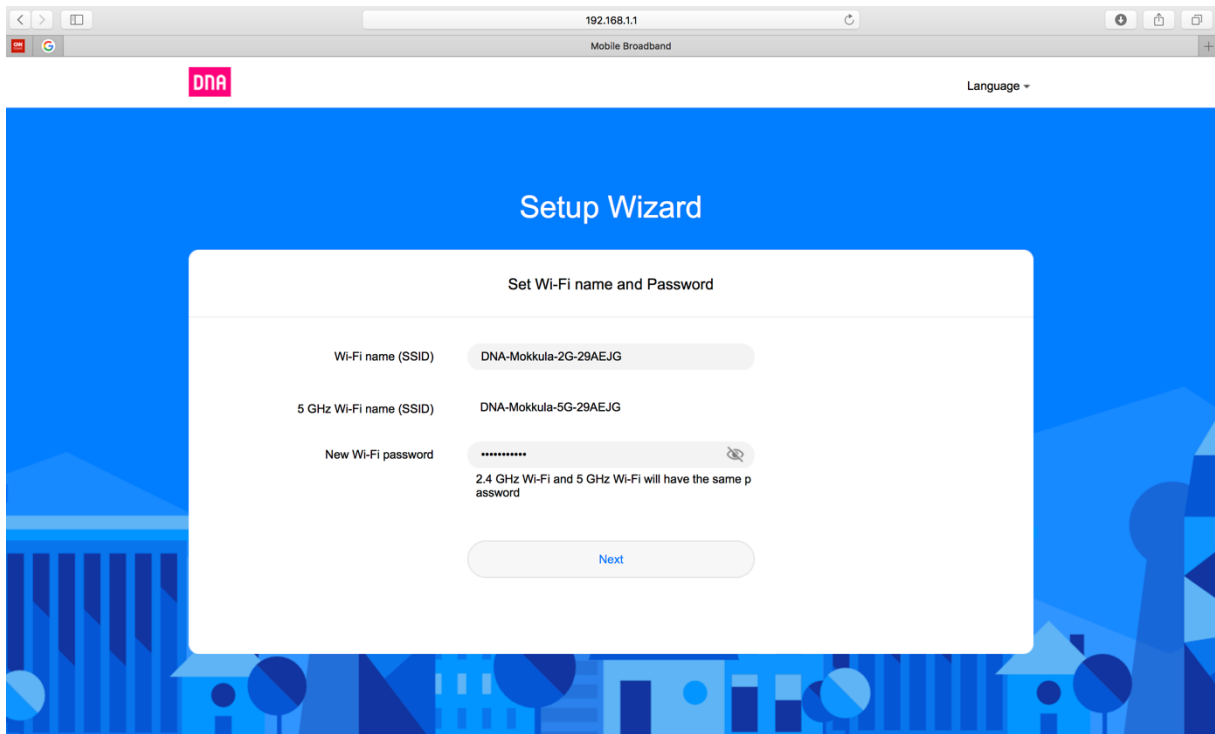


The screenshot shows a web browser window with the address bar displaying "192.168.1.1" and the page title "Mobile Broadband". The page features the "DNA" logo in the top left and a "Language" dropdown in the top right. The main heading is "Setup Wizard". Below it, a white box titled "Set Wi-Fi name and Password" contains the following fields:

- Wi-Fi name (SSID): DNA-Mokkula-2G-29AEJG
- 5 GHz Wi-Fi name (SSID): DNA-Mokkula-5G-29AEJG
- New Wi-Fi password: A masked password field with a strength indicator icon. Below it, a note states: "2.4 GHz Wi-Fi and 5 GHz Wi-Fi will have the same password".

A "Next" button is located at the bottom of the white box.

Modifiez le mot de passe du modem

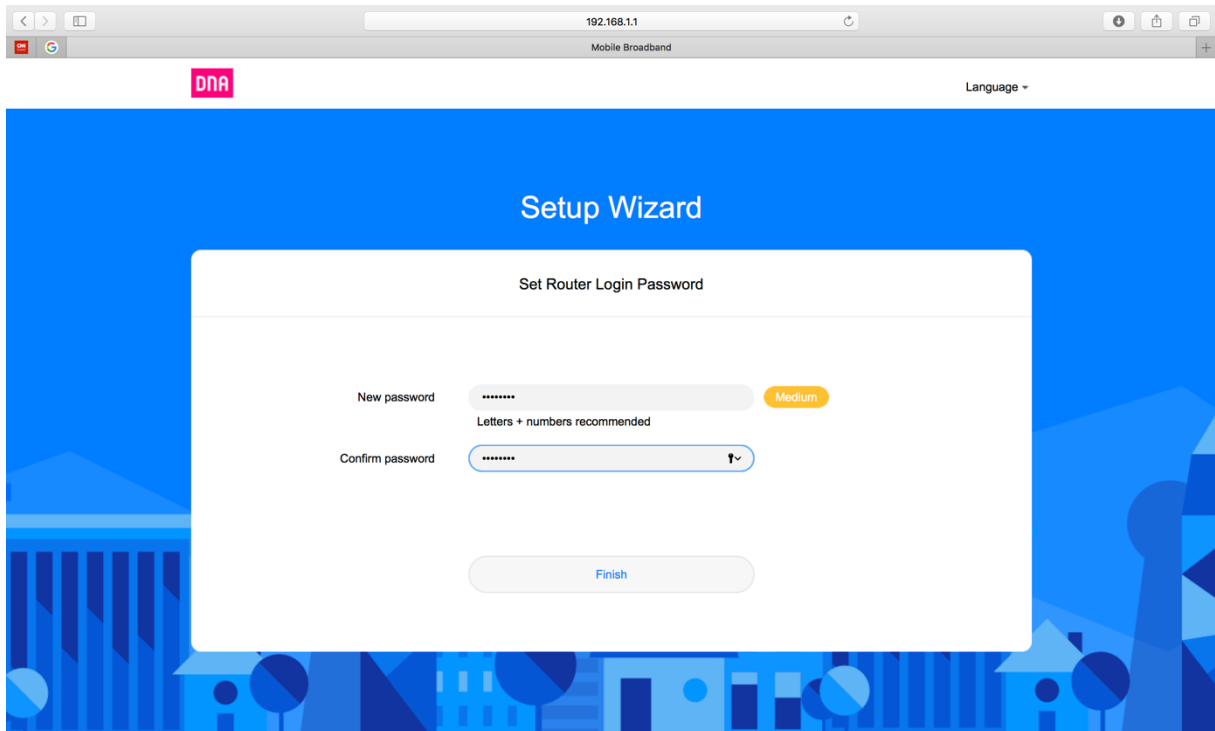

The screenshot shows the same web browser window as the previous one, but the page title is "Mobile Broadband" and the "DNA" logo is in the top left. The main heading is "Setup Wizard". Below it, a white box titled "Set Router Login Password" contains the following fields:

- New password: A masked password field with a strength indicator showing "Medium". Below it, a note states: "Letters + numbers recommended".
- Confirm password: A masked password field with a strength indicator showing "1" and a dropdown arrow.

A "Finish" button is located at the bottom of the white box.

Entrez l'identifiant APN (réseau mobile) de votre fournisseur en choisissant le profil à modifier (« Internet » par défaut)

